

# Rip Current Hazard in Klayar Beach, Pacitan, Indonesia: Inferred from Fluorescent Dye and UAV

Wahyudi<sup>1</sup>, Hendy Fatchurohman<sup>2</sup>, Verent Priscillia Rahayu Natasya<sup>3</sup>, Sujantoko<sup>4</sup>, Leo Eliasta Sembiring<sup>5</sup>  
(Received: 25 June 2024 / Revised: 26 June 2024 / Accepted: 30 June 2024)

**Abstract**— South coasts of Java have a unique landscape that exhibits exotic and phantastic natural view which is very attractive as tourist destinations. Therefore, coastal tourism potential in this area is very promising. Despite the fascination of such areas, the existence of rip current in the beach can be very hazardous to the visitors. Klayar Beach (KB) is one of the most popular recreational beaches in Pacitan Regency, East Java Province, Indonesia. However, KB poses a hazard due to rip currents. This paper presents the result of field observations of rip currents utilizing fluorescent dye and unmanned aerial vehicle (UAV). We used UAV multirotor DJI Mavic 2 Zoom with video camera to take and monitor aerial photo and video of rip current flows. The result of this study proves that there is rip currents in KB. It also reveals that the maximum velocity reaches 0.8 m/s, with average width of 11 m, and total length 99.99 m. The rip current type in the KB is defined as headland boundary controlled and predicted as a permanent rip. The use of combined uranine and UAV to investigate rip current in this study was a very effective way. It is suggested to use this approach to improve people understanding about rip current hazard for promoting beach safety.

**Keywords**—Hazards, Klayar Beach, Tourism, Permanent Rip, Safety.

## I. INTRODUCTION

Southern Java coastal area is directly facing an open sea of the Indian Ocean, therefore the width of the fetch from where the wind blows that generating incoming waves to this area is nearly unlimited. Consequently, the height of incident waves as well as incoming breaking waves are relatively high, whose significant wave height ( $H_s$ ) is ranging from 4 to 7 m with periods of more than 10 second [1]. This yields the value of  $H_s^2 T^2 > 300$ , indicating highly exposed coast. Combining with its tidal characteristics, that has semi-diurnal tides with tidal range of about 2.18 m, the southern Java coastal area is classified as wave dominated coast [1]. Hilly and mountainous morphology, heterogeneity of rocks composition with igneous rocks intrusion at some places, combined with swell dominated oceanographic environment lead this area possess unique landscapes. Embayed sandy beaches are very common along the hilly and mountainous wave-exposed coasts in southern

coast of Java. Therefore, it exhibits very exotic and phantastic natural view that attracts beachgoer who come not only from domestic but also from foreign countries.

Tourism industries in Indonesia is one of the largest foreign exchange contributors to the country. One of the most attractive tourist destinations is coastal area that globally contributes about 26 percent of ocean-related resources. South coasts of Java have a unique landscape that exhibits exotic and phantastic natural view which is very attractive as tourist destinations. Therefore, coastal tourism potential in this area is very promising.

Nearshore zone in the beach is an active area that attracts beachgoers. Despite the fascination of a such area, the existence of rip current in the beach can be very hazardous to the visitors [2, 3, 4]. The most deadly hazard for the bathing public in the nearshore area is rip currents [5, 6], especially in the south coast of Java that is oceanographically dominated by swell, since rip current is more hazardous in the swell dominated coasts [5, 7]. Unfortunately, study on rip currents in the southern coast of Java is still very rare, hence there is lack information of rip current, accordingly. Since these conditions, it offers a favourable challenge to investigate rip currents in this area.

Rip current is defined as water flows in the opposite direction to the incoming waves that extend normal to the beach [8, 9, 7, 10, 2, 3, 4, 11], shallow and narrow, can be very strong, and concentrated offshore ward-directed jet stream [7, 12, 4, 11], associated with wave action in the breaker zone [8, 13, 11], the characteristics depend on the variability of incident wave height [7, 4, 14], and heterogeneity of the sea floor topography [8, 13, 15].

This paper presents the result of the field observation of rip currents utilizing fluorescent dye and unmanned aerial vehicle (UAV). It is expected that the result of this study can benefit all stake holders especially government official to formulate mitigation measures concept against the rip current risk.

---

Wahyudi is with Department of Ocean Engineering, Institut Teknologi Sepuluh Nopember, Surabaya, 60111, Indonesia. E-mail: wahyudi.cs@its.ac.id

Hendy Fatchurohman is with Department of Earth Science, Vocational College, Universitas Gadjah Mada, Sekip Utara Jalan Kaliurang, Bulaksumur, Yogyakarta, 55281, Indonesia. E-mail: hendy.fatchurohman@ugm.ac.id

Verent Priscillia Rahayu Natasya is with Department of Ocean Engineering, Institut Teknologi Sepuluh Nopember, Surabaya, 60111, Indonesia. E-mail: priscillia.verent@gmail.com

Sujantoko is with Department of Ocean Engineering, Institut Teknologi Sepuluh Nopember, Surabaya, 60111, Indonesia. E-mail: sujantoko@its.ac.id

Leo Eliasta Sembiring is with Directorate General of Water Resources, Ministry of Public Works, The Republic of Indonesia, Jl. Pattimura 20, Jakarta Selatan, 12110, Indonesia. E-mail: leo.eliasta@pu.go.id

## II. METHOD

### A. Study Area

Klayar Beach is one of the most popular beaches recreational tourists that located at south coast of Pacitan Regency, East Java Province, Indonesia with the boundary of 8°13'23"S; 110°56'46"E to 8°13'28"S; 110°56'43"E and 8°13'30"S; 110°56'54"E to 8°13'33"S; 110°56'30"E (Fig. 1). KB shows spectacular landscape with rocky coast, embayed beach with hilly headlands and cliffed coast, sea stacks and wave cut terraces, very high and attractive incoming breaking waves. This feature of the study area is typical of the secondary coast that wave action is dominant processes [1].

Google Earth™ maps were utilized to obtain beach recreational location where rip currents supposed to be occurred and giving threat to the visitors. Satellite

imageries of Google Earth™ have been widely used by researchers for rip identification [16, 17, 18, 19, 20, 21, 1]. We used eight satellite imageries of Google Earth™ from 2009 to 2023 that show rip currents continually occur (Fig. 2).

### B. Rip Current Observation

This study used fluorescent dyeing solution of Na-fluorescein (*uranine*,  $C_{20}H_{10}Na_2O_5$ ) to observe the existence and to demonstrate the flow of rip currents in the study area. Uranine is an organic salt that has been widely used as a water flow tracing since it is environmentally harmless in adequate concentration. It has extremely low toxicity, highly soluble and stable in water. Uranine in water is also highly detectable at low concentration and visible to the naked eye [22, 23, 24, 25, 26, 27, 28].

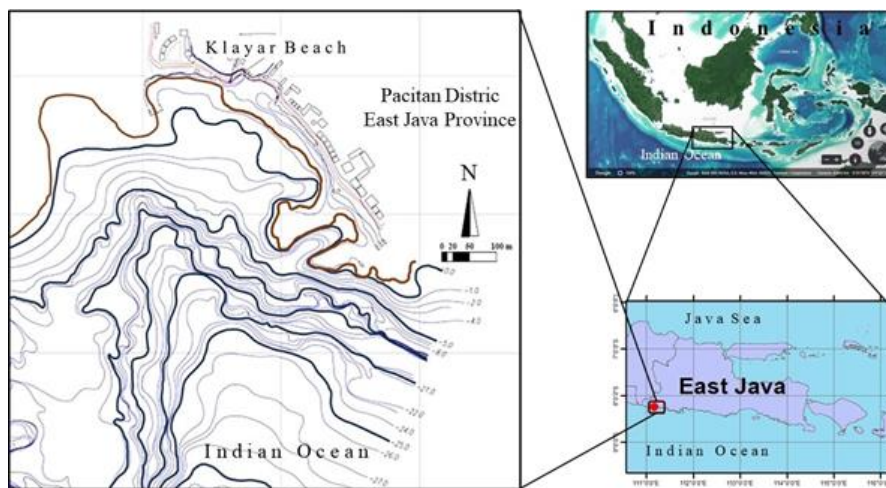


Figure 1. Location of study in the Klayar Beach, Pacitan Regency, East Java Province, Indonesia

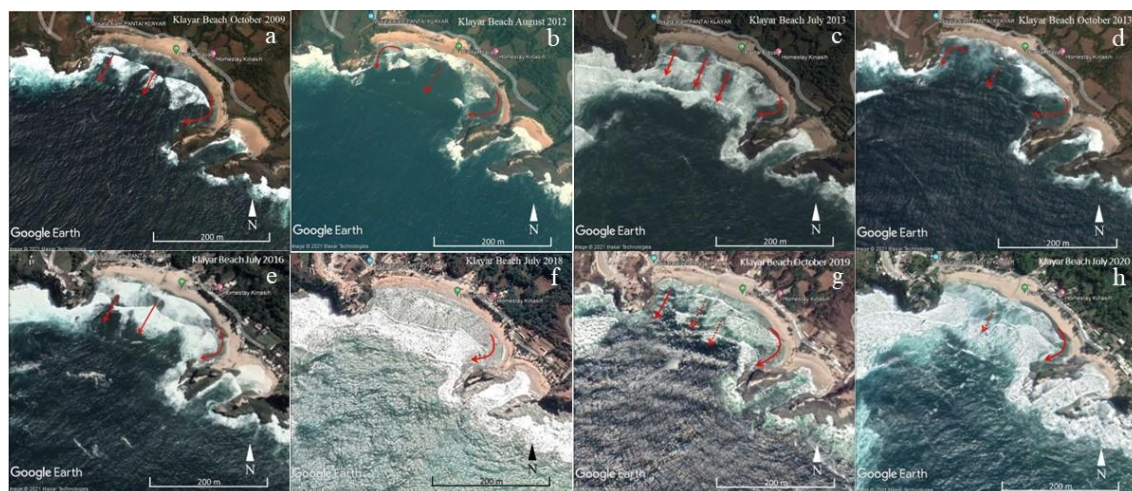


Figure 2. Eight Google Map™'s satellite imageries of the KB: (a) October 2009, (b) August 2012, (c) July 2013, (d) October 2013, (e) July 2016, (f) July 2018, (g) October 2019, and (h) July 2020 [1].

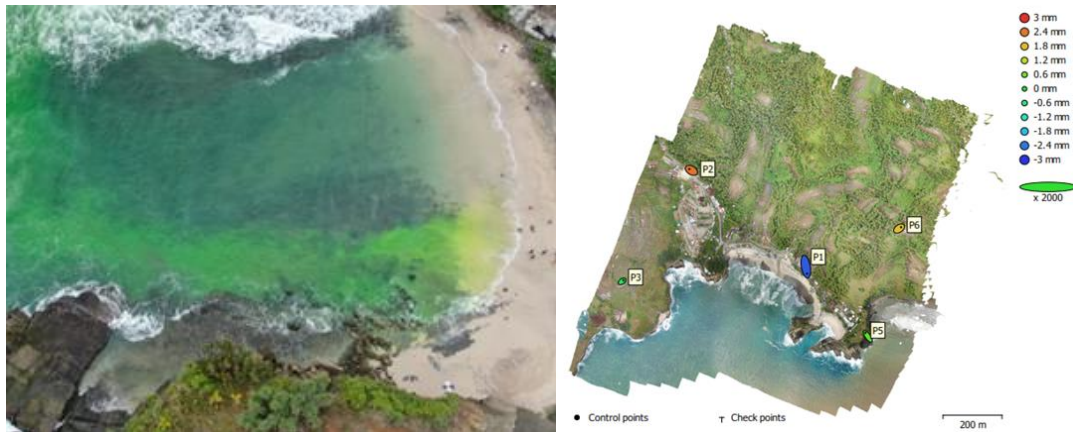


Figure 3. Geo-references used in this study, two markers (left) and five Ground Control Points (right)

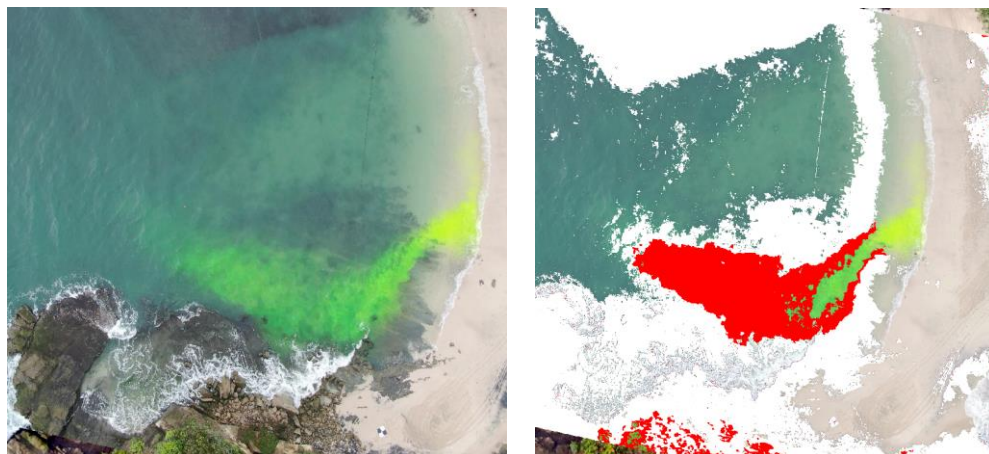


Figure 4. Pigmented sea water (left) and its segmentation of fluorescent dye areas and non-fluorescent dye areas (right)

In ideal condition, uranine can be detected in a very low limit concentration that up to 0.001 g/L. When dissolve in water, uranine has a red color at  $> 1\text{g/L}$  concentration, and a bright green color at  $>10\mu\text{g/L}$ .

The rip currents observation has been carried out by injecting the fluorescent dye uranine solution in the seawater that close to the shoreline and the movement of the pigmented seawater carried by rip current was then monitored and recorded by aerial video mounted on the unmanned aerial vehicle (UAV). We used UAV/drone multirotor DJI Mavic 2 Zoom. Aerial photo data collection is carried out using auto-pilot control Drone Deploy software that has ability to automatically create a flight path in accordance with specified area of interest. In this study, the height of the drone is arranged at an altitude of 150 m above ground level, with a coverage area of 112 hectares. Front overlap is set at 80% and side lap at 75%. This is to ensure that photos can be processed perfectly through Agisoft.

The calculation of rip current speed is done by converting drone video into a sequence of images at 15 second intervals using the Python Library, namely Open CV. The selected image is then georeferenced using the

coordinates measured on the marker. Beside the marker coordinates, geo-reference points also refer to orthophoto results that have been processed and have a clear coordinate and reference system (Fig. 3). The process of identifying tracer fluorescent dye is carried out by means of semi-automatic segmentation using ENVI software. The tool used is object identification based on Region of Interest (ROI) which will semi-automatically classify fluorescent dye areas and non-fluorescent dye areas (Fig. 4).

After all image sequences have been processed, the velocity is determined by calculating the distance of the fluorescent dye movement in each image sequence. The measured distance is then divided by a time interval of 15 seconds to obtain the dye flow velocity. The velocity is measured in several segments, including starting from the dye injection to the wave breaking zone, from the rip feeder, the rip neck ends at the rip head. For each image sequence, the average rip current width, feeder and neck length, and total rip length are also calculated.



### III. RESULTS AND DISCUSSION

#### Rip Currents Dimension

Uranine fluorescent dye was injected at two selected locations of the study area, at the center of the bay and beside headland, on 13 October 2022 and 15 October 2022, respectively. In order to make footage of the rip currents flow, we combined fluorescent dye with a video camera mounted on the drone. Rip current observations were carried out through analyses of photographs and video footage of the pigmented sea water movement by rip currents. Current velocity was measured through the conversion of video into picture sequences with an interval of 15 seconds for each sequence. The selected pictures were then referred to the two markers and five GCPs (Figure 3).

Figures 5 and 6 show the results of rip current characteristics observations based on the measured movement of each sequence from the measurement on 15 October 2022, at 10.50 and 11.08, respectively. The yellow color indicates the feeder area until it starts to enter the rip neck area. The rip neck measurement starts from the red point and goes to the rip head. Each dot indicates the tip of the fluorescent dye identified in each sequence at 15 second intervals. The results of calculating rip current characteristics at 10.56 am are as follows. Total rip length is 99.95 m, the average rip width is 10.99 m, the maximum velocity reached as high as 0.81 m/s, and minimum velocity is 0.116 m/s with average velocity of 0.44 m/s. While the result of the measurements at 11.08 are the following: total rip length is 85.06 m, the average rip width is 11.76 m, the maximum velocity up to 0.69 m/s, and minimum velocity is 0.270 m/s with average velocity of 0.44 m/s.

The detailed result of the observations is presented in Table 1.

#### Rip Current Characteristics and the Implication for Promoting Mitigation Measures

Rip current component consists of a feeder, neck, and rip head. The feeder flows relatively parallel to the shoreline as part of the longshore current that turn to seaward direction when two longshore currents converge or the flow of single longshore current is deflected by structure. While a rip neck is the longest part of the rip with the maximum speed is reached in this part. The rip head is formed outside of breaker zone with the velocity gradually decreases. Feeder and rip neck in the KB are clearly depicted by uranine pigmented seawater (Figs. 5 and 6) and those can be seen from the Google Earth™ satellite imageries (Fig. 2). Rip head, however, does not appear in the study area. It is not found in the satellite imageries (Fig. 2) and it is not expressed in the uranine fluorescent dye (Figs. 5 and 6). The rip head is difficult to form in KB since the seaward flow of water is being blocked by the incoming wave. It seems to be greater energy of incident wave than the strength of rip current. It was suggested by [29] Haller and Ozkan-Haller (2002) that wave blocking by rip currents should be rare since it requires velocities 2 m/s or more and wave periods less than 8 second. In fact, the maximum velocity of rip current in the study area was recorded as high as 0.85 m/s and  $T_p > 8$  seconds [1]. Therefore, the seaward flow of water is easily blocked by incoming waves. The existence of the edge of the east headland plays a role to bend the flow of rip currents inward of the embayment. The rip cannot flow straightly to the open

TABLE I.  
 RIP CHARACTERISTICS MEASUREMENTS OBSERVED FROM THE SEQUENTIAL PICTURES EXTRACTED AT EVERY 15 SECOND INTERVAL OF THE PIGMENTED RIP VIDEO FOOTAGE TAKEN FROM THE DRONE ON OCTOBER 2022 15<sup>TH</sup> AT 10:50 AM AND AT 11.08 AM.


Rip Anatomy	Injection at 10:50 am			Injection at 11:08 am			
	Distance between consecutive points observation (m)	Width (m)	Velocity (m/s)	Distance between consecutive points observation (m)	Width (m)	Velocity (m/s)	
Point of uranine injection	0	-	-	0	-	-	
Rip feeder	8.01	3.59	0.534	7.76	6.8	0.517	
	9.66	6.52	0.644	8.66	7.75	0.577	
	8.02	5.82	0.535	5.63	12.17	0.375	
	7.03	13.07	0.469	5.71	14.06	0.381	
Rip neck	4.40	11.85	0.296	5.48	12.6	0.365	
	4.40	11.40	0.293	5.48	12.6	0.365	
	2.66	11.43	0.177	7.04	11.74	0.469	
	4.01	11.87	0.267	5.20	11.01	0.347	
	5.00	11.71	0.333				
	5.55	13.82	0.370				
	4.07	12.42	0.271				
	1.74	13.06	0.116				
	Rip head	-	-	-	-	-	-
	Average		11.00	0.345		11.99	0.443
	Feeder length (m)	32.72			35.33		
	Neck length (m)	67.23			49.73		
Total rip length (m)	99.95			85.06			

sea, but it is deflected perpendicular to the offshore direction or even flows back shoreward (Figs. 5 and 6). This evidence clarified the results of the numerical experiment by [15]. They demonstrated that the strength and offshore extent of the rip currents decreased due to negative feedback on the wave force caused by the crash between seaward flow of currents with the incoming waves.


Based on the rip appearance that expressed by fluorescent dyeing pigmented seawater and satellite imageries and referring to [11], it is no doubt that rip current in KB is categorized as structural (headland)

boundary-controlled rip current. One of the characteristics of this type is this rip current permanently occur. Regarding this rip type, it is strongly recommended to immediately take an action for formulating mitigation measures to reduce the risk due to rip currents hazard in the KB, and along the southern coast of Java Island.

The use of uranine fluorescent dyeing combined with UAV in the present study was a very useful in rip current investigation. This method can be used not only to identify the existence of rip, but also to observe rip current characteristics, including velocity, current

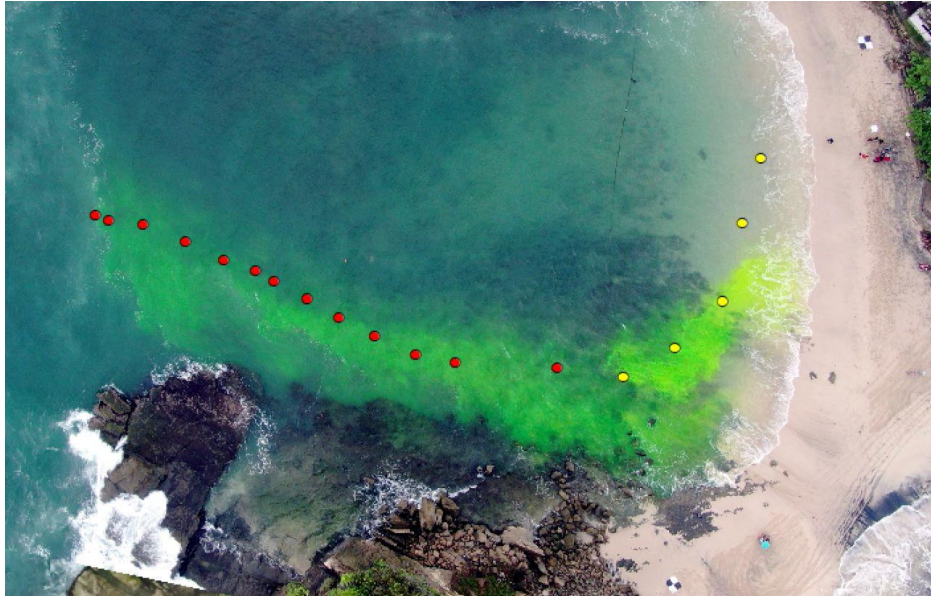

**Figure 5.** Measurements of rip current from uranine pigmented seawater on October 15<sup>th</sup> 2022 at 10:50 am (local time); yellow and red dots represent feeder and neck, respectively, with interval time observation between adjacent dot is 15 second.

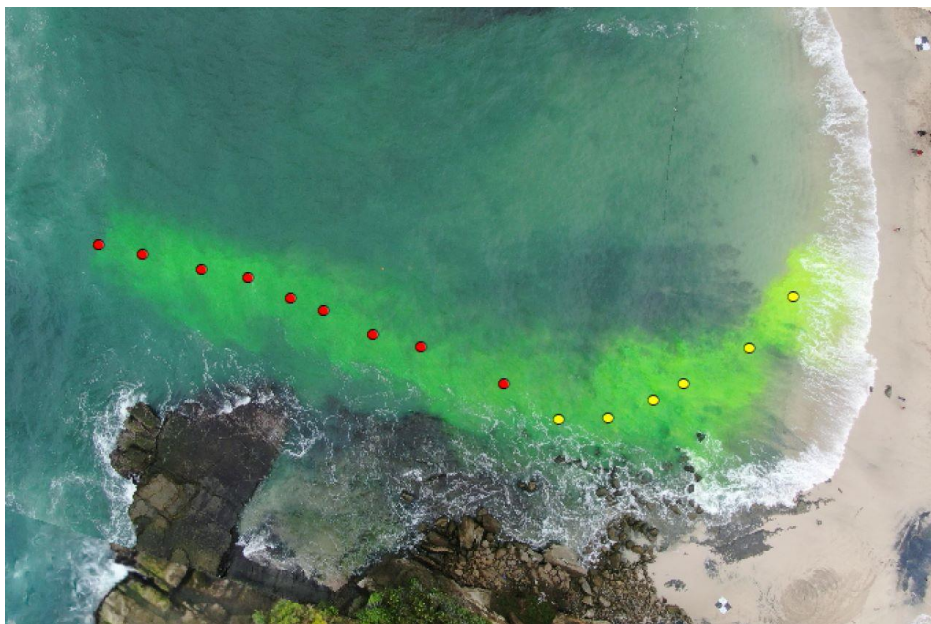

**Figure. 6.** Measurements of rip current from uranine pigmented seawater on October 15<sup>th</sup> 2022 at 11:08 am (local time); yellow and red dots represent feeder and neck, respectively, with interval time observation between adjacent dot is 15 second.

pattern, dimension, and rip type. Therefore, utilizing combined uranine and UAV will be very effective in improving the community understanding about rip current hazard for promoting beach safety.

#### IV. CONCLUSION

We have conducted field observation for rip currents identification using fluorescent dye and UAV in Klayar Beach Pacitan East Java Indonesia. We used UAV multicopter DJI Mavic 2 Zoom with video camera to take and monitor aerial photo and video of rip current flows. The result of this study proves that there is rip currents in KB. It also reveals that the maximum velocity reaches 0.8 m/s, with average width of 11 m, and total length 99.99 m. The type of rip current in the KB is structural boundary controlled and predicted as a permanent rip. Therefore, this evidence should be considered for promoting beach safety in this area. The use of combined uranine and UAV to investigate rip current in this study was a very effective way. It is suggested to use this approach to improve people understanding about rip current hazard for promoting beach safe

#### ACKNOWLEDGEMENTS

The Research Fund of the ITS Research Center, Institut Teknologi Sepuluh Nopember (ITS) Surabaya Indonesia has supported part of this study. The authors would like to sincerely thank the research assistants and technicians for their support. Thanks, are due to the anonym reviewer(s) for reviewing this paper manuscript.

#### REFERENCES

- [1] Wahyudi, V. K. Tiffany, Y. Mulyadi, H. D. Armono, K. Sambodho, L. E. Sembiring, T. V. Nguyen, "Morpho-dynamic Induced Rip Currents in Klayar Beach, Pacitan, East Java, Indonesia." IOP Conf. Ser.: Earth Environ. Sci. 1298 012035, 2024. doi:10.1088/1755-1315/1298/1/012035.
- [2] M. C. Haller and R. A. Dalrymple, "Rip Current Dynamics and Nearshore Circulation." Research Report No. CACR-99-05, August, p. 144, Center for Applied Coastal Research Ocean Engineering Laboratory, Univ. Of Delaware, Newark, DE 19716, 1999.
- [3] J. H. MacMahan, Ed. B. Thornton, Ad. J. H. M. Reiners, "Rip current review." Coastal Engineering, 53, 191-208, 2006. doi: 10.1016/j.coastaleng.2005.10.009.
- [4] S. P. Leatherman, "Rip Currents," in C. W. Finkl, (ed.), Coastal Hazards, Coastal Research Library 6, DOI 10.1007/978-94-007-5234-4\_26, # Springer Science+Business Media Dordrecht, 2013.
- [5] M. J. Austin, T. M. Scott, P. E. Russell, and G. Masselink, "Rip current prediction: development, validation, and evaluation of an operational tool." Journal of Coastal Research, 29 (2), 283-300. Coconut Creek (Florida), ISSN 0749-0208. Austin., 2013. DOI: 10.2112/JCOASTRES-D-12-00093.1
- [6] L. E. Sembiring, "Rip Current Prediction System for Swimmer Safety toward Operational Forecasting Using A Process-Based Model and Nearshore Bathymetry from Video." Ph.D. Dissertation Delft University of Technology. CRC Press/Balkema, PO Box 11320, 2301 EH Leiden, the Netherlands, 2015. ISBN 978-1-138-02940-8 (Taylor & Francis Group).
- [7] A. J. Bowen, "Rip Currents 1. Theoretical Investigations," Journal of Geophysical Research, Vol. 74, No. 23, pp 5467-5478, 1969.
- [8] F. P. Shepard, K. O. Emery and E. C. LaFond, "Rip Currents. A Process of Geological Importance," J. Geology, Vol. 49, p. 337-369, 1941.
- [9] R. S. Arthur, "A Note on the Dynamics of Rip Currents," J. of Geophysical Res., Vol. 67, No. 7, pp 2777-279, 1962. doi:10.1029/JZ067i007p02777
- [10] J. A. Smith, and J. L. Largier, "Observations of nearshore circulation: Rip currents." Journal of Geophysical Research, Vol. 100 No. C6, pp. 10,967-10,975, June 1995.
- [11] B. Castelle, T. Scott, R. W. Brander, R. J. McCarroll, "Rip current types." Earth-Science Reviews 163, 1-21, 2016. <http://creativecommons.org/licenses/by-nc-nd/4.0/>
- [12] A. D. Short, "Australian Rip Systems – Friend or Foe?" Journal of Coastal Research, SI 50, Proceedings of the 9<sup>th</sup> International Coastal Symposium, 7–11, Gold Coast, Australia, ISSN 0749.0208, 2007.
- [13] F. P. Shepard and D. L. Inman, "Nearshore Circulation," Proc. First Conf. on Coastal Engineering, Council on Wave Research, Berkeley, Oct. 1950.
- [14] A. Withers, S. Maldonado, "On the swimming strategies to escape a rip current: a mathematical approach." Natural Hazards, 108:1449–1467, 2021. <https://doi.org/10.1007/s11069-021-04740-7>
- [15] J. Yu and D. N. Slinn, "Effects of wave-current interaction on rip currents," J. Geophys. Res., 108(C3), 3088, doi:10.1029/2001JC001105, 2003.
- [16] G. Dusek, and H. Seim, "A probabilistic rip current forecast model." Journal of Coastal Research, 29(4), 909–925, Coconut Creek (Florida), ISSN 0749-0208, 2013. DOI: 10.2112/JCOASTRES-D-12-00118.1.
- [17] M. C. Haller, D. Honeggerand, P. A. Catalan, "Rip Current Observations via Marine Radar." Journal of Waterway, Port, Coastal, and Ocean Engineering, Vol. 140, No. 2, March 1, 2014. ©ASCE, ISSN 0733950X/2014/2-115–124, 2014. DOI: 10.1061/(ASCE)WW.1943-5460.0000229.
- [18] Li, 2016: Z. Li, "Rip current hazards in South China headland beaches." Ocean & Coastal Management, 121, 23-32, 2016. <http://dx.doi.org/10.1016/j.ocecoaman.2015.12.005>
- [19] G. Benassai, R. Montella, P. Aucelli, G. Budillon, M. De Stefano, D. Di Luccio, G. Di Paola, L. Mucirino, M. Sica and M. Pennetta, "Rip current evidence by hydrodynamic simulations, bathymetric surveys and UAV observation." Nat. Hazards Earth Syst. Sci., 17, 1493–1503, 2017 <https://doi.org/10.5194/nhess-17-1493-2017>
- [20] H. D. Kim, K. H. Kim, "Analysis of Rip Current Characteristics Using Dye Tracking Method." Atmosphere, 12, 719, 2021 <https://doi.org/10.3390/atmos12060719>
- [21] A. de Silva, I. Mori, G. Dusek, J. Davis, A. Pang, "Automated rip current detection with region-based convolutional neural networks." Coastal Engineering 166, 103859, 2021. <https://doi.org/10.1016/j.coastaleng.2021.103859>.
- [22] V. T. M. Nguyet, and N. Goldscheider, "A simplified methodology for mapping groundwater vulnerability and contamination risk and its first application in a tropical karst area, Vietnam," Hydrogeology Journal, January 2006, 1666–1675, doi:10.1007/s10040-006-0069-5, 395, 2006.
- [23] C. Weidner, L. Naurath, T. R. Råde, A. Banning, "Parameters AffectingNa-fluorescent (uranine) Detection in Mine Water Tracer Test" in Råde, Freund & Wolkersdorfer (Editors), "Mine Water – Managing the Challenges" 85-89, 2011.
- [24] K. M. Gerke, R. C. Sidle, D. Mallants, "Criteria for selecting fluorescent dye tracers for soil hydrological applications using Uranine as an example." Journal of Hydrology and Hydromechanics, December, 2013. 1-33, 2013. DOI: 10.2478/johh-2013-0040
- [25] S. B. Leatherman, S. P. Leatherman, "Techniques for Detecting and Measuring Rip Currents." Int J Earth Sci & Geophys., 3:014, 2017. ISSN: 2631-5033.
- [26] H. Winberg-Wang, I. Neretnieks and M. Voutilainen, "A Note on the Use of Uranine Tracer to Visualize Radionuclide Migration Experiments: Some Observations and Problems." Nuclear Technology, V. 205, 964–977, July, 2019. doi: <https://doi.org/10.1080/00295450.2019.1573620>
- [27] H. Fatchurohman, A. N. Khasanah, A. Cahyadi, "Identification of Rip Current Hazards Using Fluorescent Dye And Unmanned Aerial Vehicle (A Case Study Of Drini Beach, Gunungkidul, Indonesia)" Nat. Haz. & Earth Sys. Sci. Preprint. Discussion started: 23 August 2021. <https://doi.org/10.5194/nhess-2021-221>
- [28] A. Król, M. Gajec, E. Kukulska-Zajac, "Uranine as a Tracer in the Oil and Gas Industry: Determination in Formation Waters with High-Performance Liquid Chromatography." Water, 13, 3082, 2021. <https://doi.org/10.3390/w13213082>.
- [29] M. C. Haller and H. T. Özkan-Haller, "Wave Breaking and Rip Current Circulation." Proceedings of the 28th International Conference on Coastal Engineering, Cardiff, UK, pp. 705-717, 2002.