

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/280734919>

Engineering Design And Development Of A Small Capacity Stone Crusher Mechanism

Article in Indian Journal of Applied Research · February 2013

DOI: 10.15373/2249555X/FEB2013/36

CITATIONS

3

READS

165

3 authors, including:



Anjali Joshi

Marathwada Mitra Mandal's Institute of Technology, Lohagaon, Pune

6 PUBLICATIONS 3 CITATIONS

SEE PROFILE

Some of the authors of this publication are also working on these related projects:



Optimization of design of stone crusher [View project](#)



Design And Development Of A Small Capacity Stone Crusher Mechanism.

KEYWORDS

Mechanism, kinematic synthesis and analysis

Anjali J. Joshi

Assistant Professor in MIT Academy of Engineering, Pune

Dr. Jayant P. Modak

Emeritus Professor of Priyadarshini College of Engineering and architecture, Nagpur India

ABSTRACT Existing Stone crushers available in the market are designed for bigger sized stones and using same for crushing smaller sized stones is not an optimal solution. Presently for reducing sizes of stones from 4 X 4 to 1 X 1 in quarries is laborious job and is done manually. So development of smaller sized crusher is today's requirement. In this paper detailed design and analysis of proposed small size stone crusher mechanism is discussed. The basic idea is to optimize the design of the crusher which would be best suited for stone which need crushing force of 3 Tons.

Introduction:

The proposed research is interested in the position synthesis and analysis of a mechanism with rigid bodies (Links) interconnected by kinematic pairs (Joints) i.e. kinematic chains. This method, of completely geometrical nature, consists in finding the feasible configurations that a kinematic chain can adopt within the specified ranges for its degrees of freedom, a configuration is an assignment of positions and orientations to all links that satisfy the kinematic constraints imposed by all joints. In mechanical engineering the solution of this problem is a fundamental issue, however its relevance is even greater because important problems of other research areas can be reduced to it.

Kinematic Synthesis of Proposed Stone Crusher

The Proposed stone crusher consists of two mechanisms, which needs to be synthesized separately.

1. Crank and lever Mechanism
2. Double Rocker Mechanism.

Kinematic Synthesis of Crank and Lever Mechanism

Basically this mechanism falls under class I of a four bar mechanism, in which the shortest link can make a full revolution relative to each of the others. The three longer links can only oscillate relative to each other.

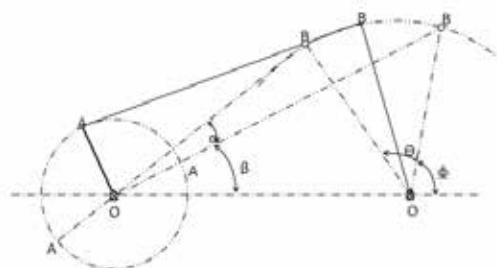


Fig -1 Synthesis of Crank and lever Mechanism

Fig 1 Crank – lever mechanism is shown with the notation to be used. As the crank (Link 1) rotates the lever i.e. link 3 oscillates through an angle ω . B_1 and B_2 are the two extreme positions of the pin at the end of the lever. A_1 and A_2 are the corresponding crank pin positions. Here it is important to note that the two swings of the lever do not take place during equal crank rotation angles.

The four bar function is a "Quick Return Mechanism. If the crank turns at a constant speed, the time ratio of two swings of the lever is The most common design problem in which, the angle of oscillation ω and angle α (or the time ration, which determines α) are specified.

Considering the following input as Time ratio T.R= 1.15, $\omega = 40^\circ$ and Length of lever = 100 cm.

Substituting the value of T.R. in equation 1, $\alpha = 12.558^\circ$ is determined.

Detailed synthesis of the mechanism is carried out by Geometrical method and optimum parameters are obtained as follows.

Crank Length – 32cm, Coupler – 110 cm, Lever – 100 cm, fixed Distance – 116 cm.

Kinematic Synthesis of Double Rocker Mechanism

This mechanism falls under Class II of four Bar mechanism, In which all members of this class no link can make a full revolution relative to any another.

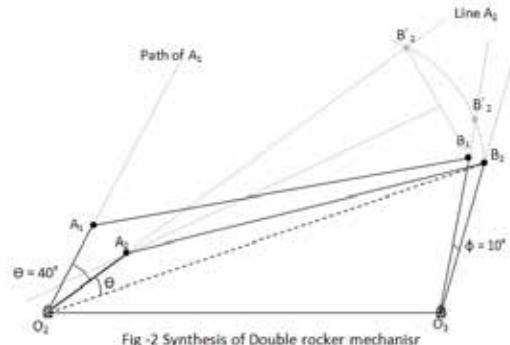


Fig -2 Synthesis of Double rocker mechanism

Fig 2 Double rocker mechanism is shown with the notation to be used. As the Input rocker O_1C (Link 3) oscillates, the other output rocker i.e. O_3D (link 5) oscillates through an angle ϕ . Considering the following input as Output Rocker Length $O_3D = 50\text{cm}$ then fixed distance $O_3O_2 = 80\text{cm}$ Input angle of oscillation = 40°

Detailed synthesis of the mechanism is carried out by Geometrical method for various output angle of oscillation ϕ . ($10^\circ, 15^\circ, 20^\circ$)

Since mechanism with output angle of oscillation $\phi = 10^\circ$ satisfies the Grashoff's law, following parameters are obtained. Input Rocker Length - 12 cm, Coupler – 104cm

Static Force analysis – Graphical Method

Analyses may be required for a number of mechanism positions; however, in many cases, critical maximum-force positions can be identified and graphical analyses performed for these positions only. An important advantage of the graphical approach is that it provides useful insight as to the nature of the forces in the physical system.

Figure below shows the angular position of crank $\omega=600$

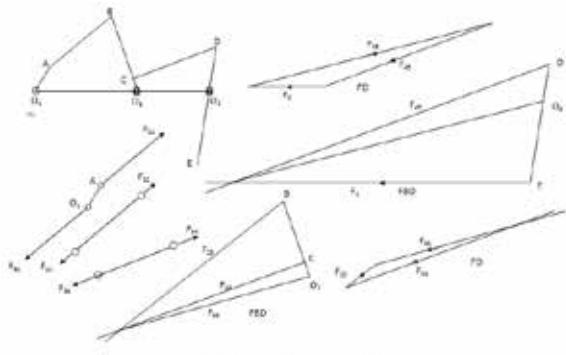


Fig.3 Static Force analysis - Graphical Method

The mechanism is analyzed graphically and ultimately the torque on the crank is computed. From the above Force polygon $F_{45} = 7.3$ tons in the direction shown.

Crushing force at the extension of output rocker is considered approx. 3 Tons. And Crank is rotating at an angular speed of 120 rpm (Anticlockwise)

$$F_{45} = -F_{54} = F_{34} = -F_{43} \text{ and } F_{23} = 1.3 \text{ tons.}$$

$$F_{32} = -F_{23} = F_{12} = -F_{21} = F_{61}$$

Summing Moments about point O_1 gives torque required on the crank.

$\Sigma M_{O_1} = T_{O_1 A} + F_{21} \times h = 0$
For equilibrium, the torque $T_{O_1 A}$ must be equal to $F_{21} \times h$. This is shown in Fig. Because the cross-product $F_{21} \times h$ is clockwise, the torque must be anticlockwise.




Fig.4 Torque required on crank

Fig.4 Torque required on crank

So we have calculated a torque required on the crank which is given in a tabulated form.

Table: 1 Crank Angular Position Vs force on various links

Sr. No	Crank Angular Position	Coupler force on Link AB (in Tons)	Coupler force on Link CD (in Tons)	Torque required on Crank $\text{in } \text{Nm}$
1	30°	1.3	6.2	1560 _{Clockwise}
2	60°	1.3	7.3	1690 _{Anti-Clockwise}
3	90°	1	7	2400 _{Anti-Clockwise}
4	120°	0.7	7	2240 _{Anti-Clockwise}
5	150°	0.7	6.6	2030 _{Anti-Clockwise}
6	180°	1.1	7.1	2310 _{Anti-Clockwise}
7	210°	0.8	6.4	960 _{Anti-Clockwise}
8	240°	1	7.5	1000 _{Anti-Clockwise}
9	270°	1.1	7.2	1320 _{Clockwise}
10	300°	1.2	7.4	3120 _{Clockwise}
11	330°	0.8	6.7	2880 _{Clockwise}
12	360°	0.8	7.8	4200 _{Clockwise}

Above table indicates that maximum force in a revolution of crank on coupler AB is 1.3 Tons and on Coupler CD is 7.8 Tons.

Dynamic Force analysis - Graphical Method

Dynamic force Analysis for Proposed Stone crusher uses d'Alembert's principle can be derived from Newton's second law.

$$F + (-ma_G) = 0 \quad (1)$$

$$T_{eG} + (-I_G \alpha) = 0 \quad (2)$$

The terms in parentheses in Eq. (1) and (2) are called the reverse-effective force and the reverse-effective torque, respectively. These quantities are also referred to as inertia force and inertia torque. Thus, we define the inertia force F_i , as

$$F_i = -maG \quad (3)$$

This reflects the fact that a body resists any change in its velocity by an inertia force proportional to the mass of the body and its acceleration. The inertia force acts through the center of mass G of the body. The inertia torque or inertia couple C_i , is given by:

$$C_i = -I_G \alpha \quad (4)$$

As indicated, the inertia torque is a pure torque or couple. From Eq.(3) and (4), their directions are opposite to that of the accelerations. Substitution of Eq. (3) and (4) into Eq. (1) and (2) leads to equations that are similar to those used for static-force analysis:

$$\sum F = \sum F_e + F_i = 0 \quad (5)$$

$$\sum T_G = \sum T_{eG} + C_i = 0 \quad (6)$$

Where $\sum F$ refers here to the summation of external forces and $\sum T_{eG}$ is the summation of external moments, or resultant external moment, about the center of mass G

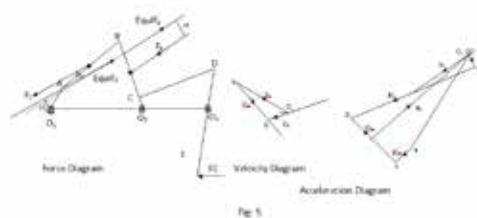


Fig: 5

In graphical force analysis we will account for inertia torques by introducing equivalent inertia forces. These forces are shown in figure, and their placement is determined. For link 2 offset forces F_2 is equal and parallel to inertia force F_{12} . Therefore

$$F_2 = 78825 \text{ N.}$$

It is offset from the centre of mass G_2 by a perpendicular amount equal to $h_2 l G_2 o_2 m_2 a_2 G_2$

$$h_2 = (10598.08 * 28.10) / (10.51 * 7500)$$

$$h_2 = 3.77 \text{ cm.}$$

And this offset is measured to the left to produce the required clockwise direction for the inertia moment about point G_2 . In a similar manner the equivalent offset inertia force for link 3 is $F_3 = 39155 \text{ N}$ at an offset distance $h_3 = (l G_2 a_2) / (m_2 a_2 G_2)$

$$h_3 = (7692.5 * 82.5) / (9.55 * 4100)$$

$$h_3 = 16.67\text{cm}$$

And this offset is measured to the right to produce the required clockwise direction for the inertia moment about point G3

Taking moment @ O1

$$= (F1H1) + (F2H2)$$

$$= (78825 \times 25) + (39155 \times 6)$$

$$= 2205555 \text{ N-cm}$$

$$= 22055.5 \text{ N-m.}$$

Similarly Velocity, accelerations and corresponding Torque at various positions are calculated.

Shown in Tabulated form

Table: 2 Crank Angular Position Vs Torque on Crank Considering Dynamic Loading

Sr.No	Crank Angular Position	Torque required on Crank O ₁ A Considering Dynamic Loading (in Nm)
1	30°	22055.5
2	60°	8655.09
3	90°	17820.98
4	120°	32328.84
5	150°	29472.28
6	180°	7270.08
7	210°	4879.62
8	240°	7219.01
9	270°	11404.5
10	300°	34764.0
11	330°	26493.5
12	360°	24138.78

Total torque = Static Torque + Dynamic Torque Below table shows Total torque required at various Crank Positions.

Table: 3 Crank Angular Position Vs Net Torque on Crank

Sr.No	Crank Angular Position (°)	Torque required on Crank O ₁ A Considering Static Loading (in Nm)	Torque required on Crank O ₁ A Considering Dynamic Loading (in Nm)	Net Torque on Crank O ₁ A (T)
1	30°(Loaded Condition)	+1560	+22055.5	23615.5
2	60°(Loaded Condition)	-1690	+8655.09	6965.09
3	90°(Loaded Condition)	-2400	-17820.98	-20220.98
4	120°(Loaded Condition)	-2240	-32328.84	-34568.84
5	150°(Loaded Condition)	-2030	-29472.28	-31502.08
6	180°(Loaded Condition)	-2310	-7270.08	-9580.08
7	210°(No Load Condition)	0	+4879.62	+4879.62
8	240°(No Load Condition)	0	+7219.01	+7219.01
9	270°(No Load Condition)	0	+11404.5	+11404.5
10	300°(No Load Condition)	0	+34764.0	+34764.0
11	330°(No Load Condition)	0	-26493.5	-26493.5
12	360°(No Load Condition)	0	-24138.78	-24138.78

Net Torque on the crank is calculated and the actual torque required in one revolution of crank is tabulated in the following graph.

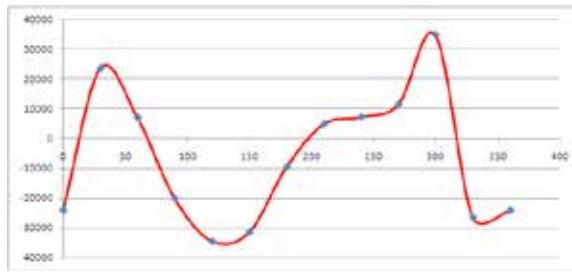


Fig:6 Graph of Total Torque On crank Vs One revolution of crank Applying Newton-Cotes quadrature formula and composite Trapezoidal rule, Total area under this Curve is calculated which represents work done per revolutions.

$$\text{Work done per revolution} = \int T d\theta$$

$$= \frac{\Delta\theta}{2} [T_1 + T_N + 2(T_2 + T_3 + \dots + T_{N-1})]$$

$$= -30051.42 \text{ Nm.rad}$$

$$T_{\text{mean}} = \frac{\int T d\theta}{\int d\theta}$$

$$= -4782.83 \text{ Nm (i.e. Anticlockwise)}$$

Further mean torque is calculated which decides the other input parameters like drive rating, flywheel etc.

Area under shaded portion gives a maximum fluctuation of energy based on which flywheel is designed.

Based on design of complete stone crusher mechanism the other parameters of a stone crusher like design of Motor, belt drive, Flywheel design, gear box etc are decided. Figure given below shows a complete layout of small capacity stone crusher

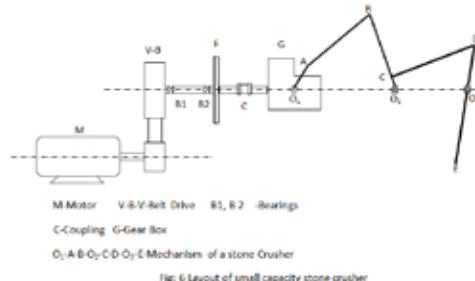


Fig: 6 Layout of small capacity stone crusher

Flywheel Parameters:

Type of Flywheel: Solid disc geometry with inside and outside radius

Type and Density of Material: 7200 Kg/m²

Speed: 900 r. p. m.

Inside radius: 387 mm

Outside radius: 484 mm

Thickness: 48mm

Total mass of flywheel: 92.49Kg.

Worm Gear Box:

Specifications: Worm Gear Box, Speed Reduction ratio 7.5:1, Power: 109 KW

V-Belt Drive

For speed reduction from 1500 rpm to 910 rpm, Number of belts: 8 of type 8V1250, Type of Pulley 8V Grooves Sheaves of D Type.

Motor:

75 KW, 4Pole, 1500rpm

Conclusion: -

Here we discussed about graphical method to synthesize and analyzed the mechanism and derived a related parameters used for proposed stone crusher. With the same logic we can develop software which will be useful for manufacturing industries to design the small capacity stone crusher.

REFERENCE 1.Dr.Mostafa S.Habib ,MEG 373"Kinematic and Dynamics of Machinery,Chapter 5 Force Analysis. | 2) Jack A. Collins, Henery Busby, George Stoab, Mechanical Design of Machine Elements & Machines Chapter 18 Flywheel and High –Speed Rotors. | 3) Shriniwas S. Bali, Satish Chand, Transmission Angle in Mechanism (Triangle in mech), Pergamon Mechanism and Machine Theory 37(2002)175-195. | 4) Dr. Louis G. Reifschneider, Teaching Kinematic Synthesis of Linkages without Complex Mathematics, journal of Industrial Technology, Volume 21, Number 4-October 2005 through December. | 5) Kennth J. Waldron / Gary L. Kinzel, Kinematic , Dynamics,& Design of Machinery, edition 2007. |