

MODIFICATION OF REINFORCED CONCRETE RETAINING WALL AT PILANGBANGO RESERVOIR CONSTRUCTION PROJECT MADIUN, EAST JAVA

Mudji Irmawan¹, Yerry Kahaditu Firmansyah.², Afif Navir Refani³

¹ Program Studi Teknik Sipil FTSP ITS, Surabaya

² Universitas Pembangunan Nasional "Veteran" Jawa Timur

³ Program Studi Diploma Teknik Sipil FTSP ITS, Surabaya

E-Mail : mudji.irmawan.arkani@gmail.com, yerry.kaha@gmail.com, navir.refani@gmail.com

ABSTRACT

The reservoir is the tendon of water in order to accommodate the excess rain water in the rainy season and its utilization in the dry season for various purposes, both in the field of agriculture as well as the interests of the community. To find out the cause of the crack wall of the reservoir Pilangbango Madiun, East Java, then do the test strongly press on concrete walls and soil investigations on the area of the reservoir. Spunpile 400 mm in diameter used by the mounting distance 200 cm and a depth of 12 m and pole mounted on the heels of concrete walls. Manual calculation of the results and analysis of the Finite Element program it can be concluded that in the presence of an additional retaining her 400 spunpile mm using a distance 200 cm and a depth of 12 m, retaining wall construction is then quite able to hold style pillow case and Sliding with style has a safety factor more than 1.5. So the movement of the sliding walls do not happen again.

Keywords : Reservoir wall stability, Reinforcement modification, Finite Element.

I. INTRODUCTION

Temporary water or shelter is often referred to with the bozem construction should be built as sturdy as possible so that it can function optimally. However, the construction of the bozem Pilangbango Madiun, East Java does not run as expected which is occurring cracks on the walls of the bozem. As for the picture of the construction of the Pilangbango dam before the modification of reinforcement purposes (Figure 1) to anticipate more severe then the damage is done by modifying the structure of the dam retaining of course with a lot of reviewing aspects of the styles that occurred at the bozem construction.




Figure 1. Existing conditions field (without reinforcement)

II. METHODOLOGY

In this research the data required are secondary data. Secondary data include data on the investigation of soil, the floor plan of the existing dam, construction Details, pieces of the Pictures and specifications of the materials used.

From the data already collected, analyzed what causes occurrence of shift and cracks on the walls of the bozem. The analysis was conducted would result in measures to resolve the problem by using a solutions based on by the theories and the study of literature.

As for systematic problem solving based on the theory that there is organized as follows:

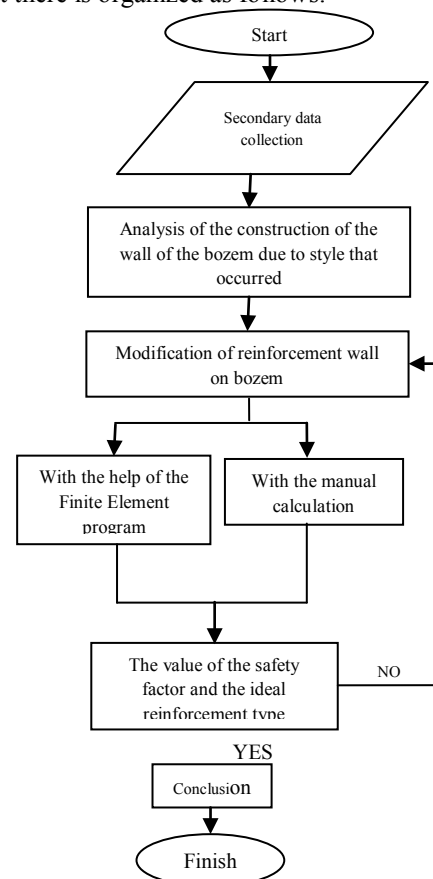

III. RESULTS AND DISCUSSION

Ground investigation data used in the analysis of retaining wall of the bozem is the borehole B-1 because it is considered to have a tendency of value N-SPT is relatively small. As for the Division of the soil layers in the Finite Element modelling will be done is as follows:

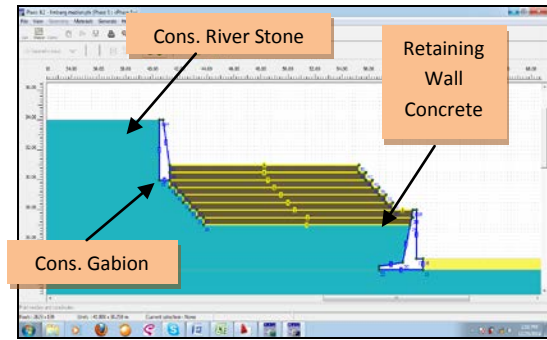
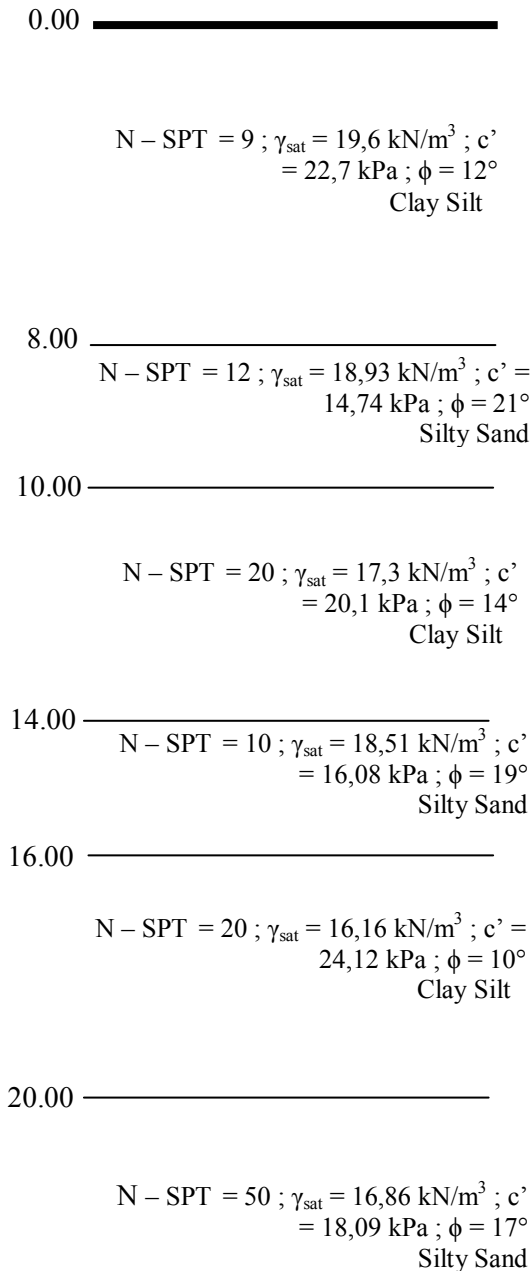


Figure 2. Initial Sketch Modeling

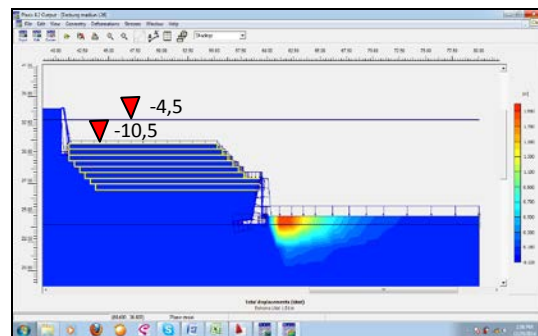


Figure 3. Distribution Voltage that occurs (without retaining)

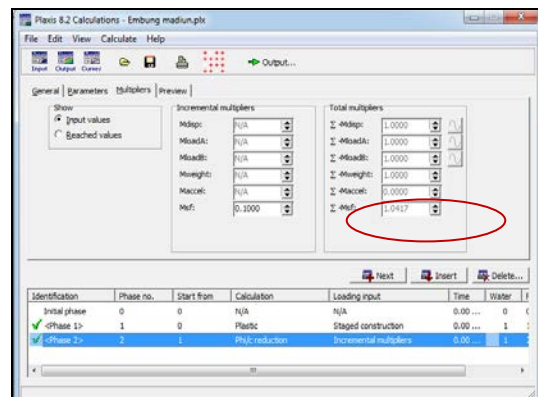


Figure 4. Calculations Result The obtained Values SF 1.04

From the results of the analysis above, that the structure of the dam without retaining additional security number value obtained amounted to 1.04. To increase the number of security then used an additional retaining the form of spunpile and pair of stone times. As for retaining models that will be done is as follows:

Above ground as well as data from Picture 1. Existing conditions field (without any reinforcement purposes) then gained modeling for Finite Element as follows:
a) Analysis With The Finite Element Program (without any reinforcement purposes)

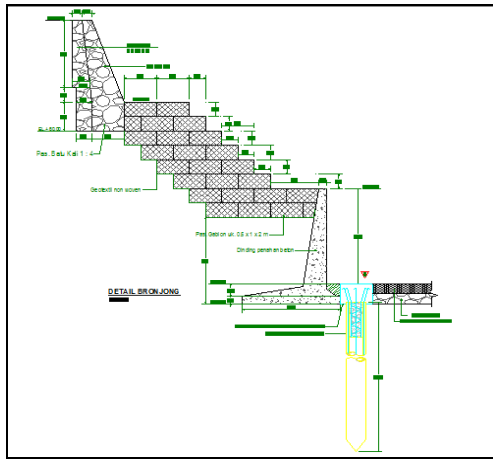


Figure 5. Existing conditions field (with a retaining)

Types of data and retaining wall of the dam will be used:

- Spunpile 400 with a length of 12 meters as well as the distance center to center is 2 meters.
- Stone Couple times approx 0.30 metres mounted on the base of the dam as a counter weight.

b) Analysis With The Finite Element Program (with a reinforcement)

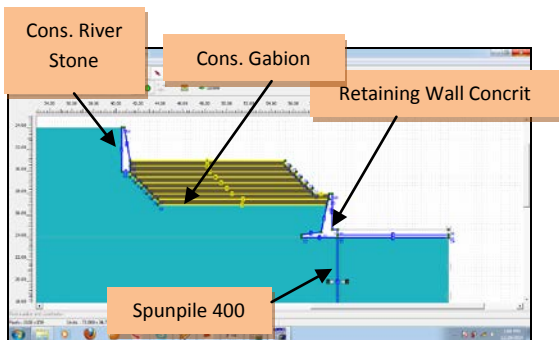


Figure 6. Initial Sketch Modeling

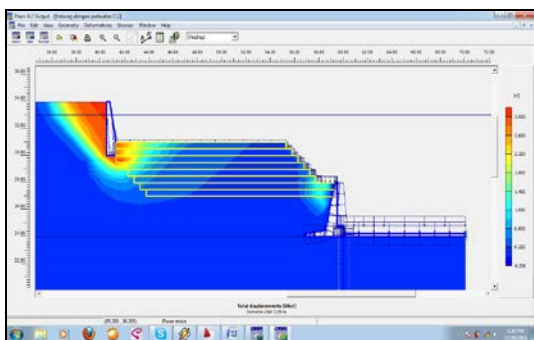


Figure 7. Distribution Voltage that occurs (with a retaining)

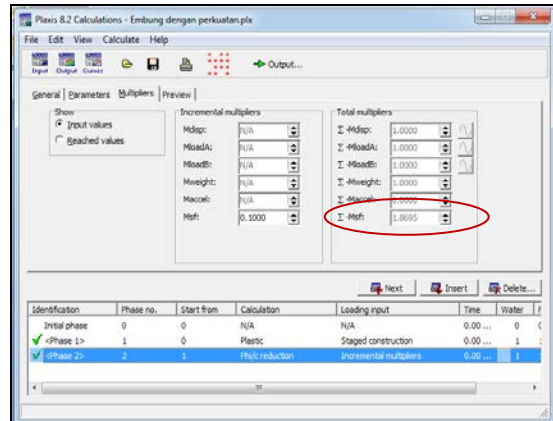


Figure 8. The results of the Calculations Obtained the value SF 1.86

c) Control Styles That Occurred In The Structure Of The Reservoir

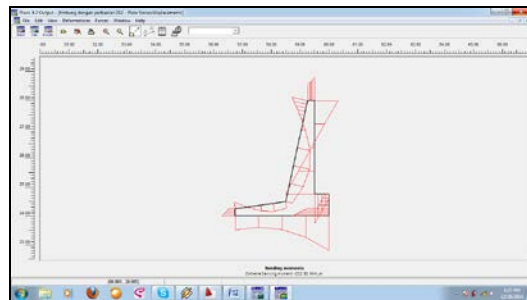


Figure 9. Bending Moment happens on the Concrete retaining walls Of 232.50 kN. M

If the magnitude of the bending moment that occurs in concrete retaining walls of 232.50 kN. m, then the magnitude of the style press, P happens bending moment occur High wall 232.50 7.04 3.3 tons.

When the quality of concrete used was K-225 capacity then permit materials concrete retaining walls, concrete Quality material permits $P_{allowable\ material} = \text{Concrete quality} \times \text{height wall} \times \text{width wall}$ (as wide as center to center on a pile) = 2250 x 3.3 x 2 14850 ton. $P_{happened} < P_{material\ permit\ capacity} \dots$ (Secure)

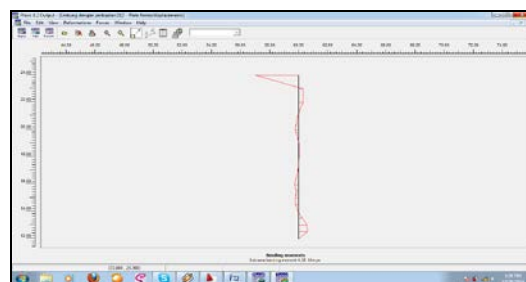


Figure 10. Bending Moment happens on the Spun pile Of 4.15 400 kN. m

Classification								
Outside Diameter (mm)	Wall Thickness (mm)	Class	Concrete Cross Section (cm ²)	Unit Weight (Kg/m)	Length (m)	Bending Moment Crack (Ton.m)	Ultimate (Ton.m)	Allowable Axial Load (Ton)
300	60	A2	452	113	6 - 13	3,50	3,75	72,60
		A3				4,00	4,50	75,75
		B				4,00	6,30	83,50
350	65	A1	582	145	6 - 15	3,50	5,25	93,10
		A3				4,20	6,30	89,50
		B				5,00	9,00	96,40
400	75	A2	766	191	6 - 16	5,50	8,25	121,10
		A3				6,50	9,75	117,60
		B				7,50	13,50	114,40
450	80	A1	930	232	6 - 16	7,50	11,25	149,50
		A2				8,50	12,75	145,80
		A3				10,00	15,00	143,80
500	90	A1	1159	290	6 - 16	11,00	19,80	179,10
		A2				12,50	25,00	174,90
		B				12,50	25,00	169,00
600	100	A1	1571	393	6 - 16	17,00	25,50	252,70
		A2				19,00	28,50	249,00
		A3				22,00	33,00	243,20
700	120	A1	2100	525	6 - 16	25,00	45,00	338,30
		A2				29,00	56,00	329,50
		B				29,00	56,00	329,50

Figure 11. Classification Of The Spun Pile Brochure

To the capacity of the Spun Pile, the magnitude of the bending moment that happened was 0.41 m ton. While capacity materials based on brochure above is 9 m ton.

$M_{\text{happened}} < M_{\text{material permit}} \dots$ (Secure)

d) Power Control Support Under The Concrete Reinforcement Walls

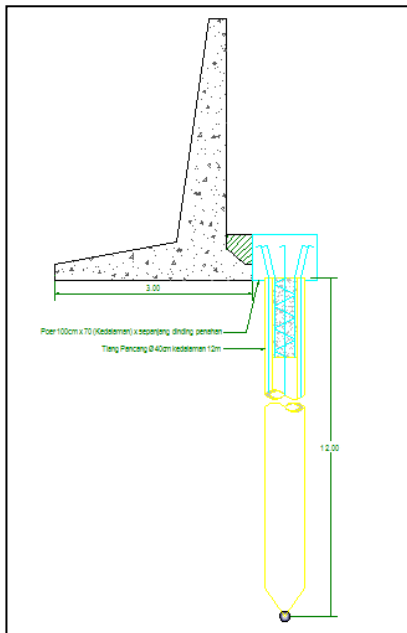


Figure 12. Construction Of A Concrete Wall.

$$Q_{ult} = \frac{1}{2} \times \gamma' \times B \times N\gamma + C' \times Nc + q \times Nq$$

The Foundation Continuously = $\frac{1}{2} \times 0,96 \times 3 \times 0,86 + 2,2 \times 9,4 + 0 \times 5,44$
 = 21,92 t/m²

If the Foundation width as wide as the center review to center on 2 meters, then:

$$Q_{ult} = 21,92 \text{ t/m}^2 \times 2 \text{ meter} \times 3,3 \text{ meter}$$

$$= 144,67 \text{ ton}$$

$$Q_{all} = Q_{ult} / SF$$

$$= 48,2 \text{ ton}$$

where,

B = Wide base the foundation (m)

γ' = Effective land heavy volume(t/m³)

$$= \gamma_{\text{sat}} - \gamma_w$$

C' = Effective cohesion land (t/m²)

$$= 2/3 \times C_u$$

q = Load as deep as D from land face lowest (t/m²)

D = High foundation (m)

N γ , Nc, Nq = Reduction Factor (table)

Table 1. Reduction Factor

θ°	Nc	N γ	Nq
0	5.14	0.00	1.00
5	6.50	0.10	1.60
10	8.40	0.50	2.50
15	11.00	1.40	4.00
20	14.80	3.50	6.40
25	20.70	8.10	10.70
30	30.00	18.10	18.40
35	46.00	41.00	33.30
40	75.30	100.00	64.20
45	134.00	254.00	135.00

(Source: Terzaghi K, Peck R.B, 1967)

Calculation of power support permission powerboats spun type diameter of 40 cm with a depth of 12 meters is 41.5 tons, recapitulation of the calculation can be seen in table 2 below.

Table 2. Power Pole Support Ø 40 cm

Depth(m)	Elevation(mLWS)	N	N'	Np'	K	Ap	Qp	Ns1	qs	As	Qs	QL (ton)	Qall (ton)
2.00	-2.000	9	12	12.5	20	0.12560	31.4	9.0	4.0	2.51	10.1	41.5	13.8
4.00	-4.000	11	13	13.0	20	0.12560	32.7	11.0	4.3	5.03	21.8	54.4	18.1
6.00	-6.000	13	14	13.8	20	0.12560	34.7	13.0	4.7	7.54	35.2	69.9	23.3
8.00	-8.000	14	15	14.0	20	0.12560	35.2	14.0	4.9	10.05	49.4	84.6	28.2
10.00	-10.000	12	14	15.5	20	0.12560	38.9	12.0	4.9	12.57	62.0	100.9	33.6
12.00	-12.000	22	19	16.5	20	0.12560	41.4	22.0	5.5	15.08	82.9	124.4	41.5
14.00	-14.000	20	18	16.2	20	0.12560	40.6	20.0	5.8	17.59	102.2	142.8	47.6
16.00	-16.000	10	13	15.8	20	0.12560	39.8	10.0	5.6	20.11	113.1	152.9	51.0
18.00	-18.000	20	18	16.2	20	0.12560	40.6	20.0	5.9	22.62	132.4	173.0	57.7
20.00	-20.000	22	19	22.8	20	0.12560	57.4	22.0	6.1	25.13	153.3	210.7	70.2
22.00	-22.000	50	33	28.5	20	0.12560	71.6	50.0	7.2	27.65	197.7	269.3	89.8
24.00	-24.000	54	35	33.5	20	0.12560	84.2	50.0	8.0	30.16	242.1	326.3	108.8

(Source: Consultan Soil Engineer)

Because the concrete retaining walls are already assembled together into one pillar of a stake, so the power support construction is as follows:
 $Q_{all \text{ wall concrete}} (DDT) = Q_{all \text{ driften}} +$
 $= 41,5 \text{ ton} + 48,2 \text{ ton}$

= 89,7 ton

As for the magnitude of the axial style happens to be in the concrete wall of a finite element modeling of 362.60 kNm.

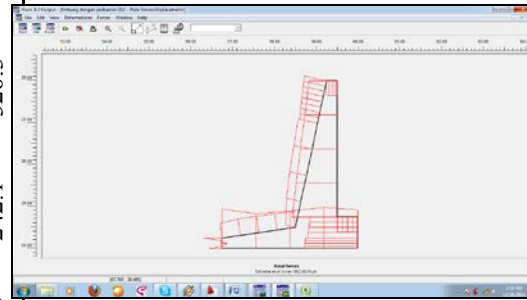


Figure 13. Axial Happens ($Q_{happened}$) on a concrete wall of 362.60 kNm

For the width of the Foundation, as wide as center into the center on 2 meters, then:

$$Q_{happened} = 36,260 \text{ t/m} \times 2 \text{ m} = 72,4 \text{ ton}$$

Secure Requirements: $Q_{all} (DDT) \geq Q_{happened}$
 $89,7 \text{ ton} \geq 72,4 \text{ ton} \dots \dots \dots$ **SECURE**

Based on the analysis of Finite Element against the stability of retaining wall with the do use spun pile diameter 40 cm ideal conditions obtained. As for the manual calculation analysis against the stability of the dam wall construction the following analysis looks like below:

e) Control Against Overturning

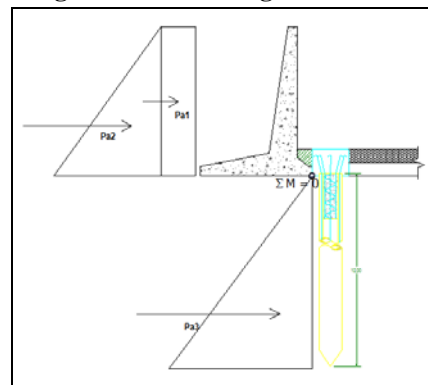


Figure 14. Sketch Styles For A Control Analysis Of Rolling

Point A is the point of the pillow case that is on a heel of concrete retaining walls

$$SF = \text{Momen Penahan} / \text{Momen Guling} = Mp / Mg \geq 2$$

$$Ka = \tan^2 (45 - \phi/2) = \tan^2 (45 - 12/2)$$

$$= 0,66$$

$$\begin{aligned} Pa_1 &= q \times H \times Ka \times 2 \text{ m} \\ &= 4 \text{ t/m}^2 \times 4 \text{ m} \times 0,66 \times 2 \text{ m} \\ &= 21,12 \text{ ton} \end{aligned}$$

$$\begin{aligned} Pa_2 &= \frac{1}{2} \times \gamma_{\text{sat}} \times H^2 \times Ka \times 2 \text{ m} \\ &= 0,5 \times 1,96 \text{ t/m}^3 \times 4^2 \text{ m} \times 0,66 \times 2 \text{ m} \\ &= 20,69 \text{ ton} \end{aligned}$$

$$\begin{aligned} Pa_3 &= \frac{1}{2} \times \gamma_{\text{sat}} \times H^2 \times Ka \times 0,4 \text{ m} \\ &= 0,5 \times 1,96 \text{ t/m}^3 \times 12^2 \text{ m} \times 0,66 \\ &\quad \times 0,4 \text{ m} \\ &= 37,25 \text{ ton} \end{aligned}$$

$$\begin{aligned} Mp &= (Pa_3 \times 8 \text{ m}) \\ &= (37,25 \times 8 \text{ m}) \\ &= \mathbf{298 \text{ t.m}} \end{aligned}$$

$$\begin{aligned} Mg &= (Pa_1 \cdot y_1) + (Pa_2 \cdot y_2) \\ &= (21,12 \times 2) + (20,69 \times 1,33) \\ &= \mathbf{69,76 \text{ t.m}} \end{aligned}$$

where,

Ka = Coefficient of active soil

Pa₁ = Force pressure active due to load evenly (ton)

Pa₂ = Lateral force pressure land active (ton)

Pa₃ = Lateral force pressure land active (ton)

φ = Angles sliding the ground in (°)

γ_{sat} = Heavy volume wet land (t/m³)

H = Depth (m)

Mp = Retaining moment (t.m)

Mg = Rolling moment (t.m)

$$\text{Safe Condition: } Mp / Mg \geq 2$$

$$298 \text{ t.m} / 69,76 \text{ t.m} \geq 2$$

$$4,27 \geq 2 \dots\dots\dots \mathbf{Secure}$$

f) Control Of Sliding

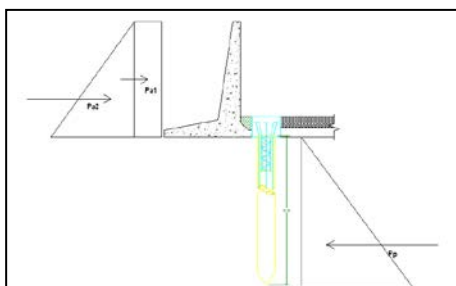


Figure 15.
 Sketch Styles For A Control Analysis Of Shear

$$\begin{aligned} Kp &= \tan^2 (45 + \phi/2) \\ &= \tan^2 (45 + 12/2) \\ &= 1,52 \end{aligned}$$

$$\begin{aligned} Pp &= \frac{1}{2} \times \gamma_{\text{sat}} \times H^2 \times Kp \times 0,4 \text{ m} \\ &= 0,5 \times 1,96 \text{ t/m}^3 \times 12^2 \text{ m} \times 1,52 \\ &\quad \times 0,4 \text{ m} \\ &= 85,8 \text{ ton} \end{aligned}$$

SF = Sliding force resistance

$$= Fp / Fg \geq 1,5$$

$$= (Pp) / (pa1 + pa2)$$

$$= (85,8) / (21,12 + 20,69)$$

$$= 2,05 \geq 1,5 \dots\dots\dots \mathbf{Secure}$$

where,

Kp = Coefficient of passive soil

Pa₁ = Style pressure active due to load evenly (ton)

Pa₂ = Lateral force pressure land active (ton)

Pp = Lateral force pressure land passive (ton)

IV. CONCLUSIONS

Manual calculation of the results and analysis of FINITE ELEMENT programs above it can be concluded that in the presence of an additional retaining her 400 spunpile mm using a distance 200 cm and a depth of 12 m along the circumference of a bozem placed on the ends of the base of the bozem wall, retaining wall construction is then quite able to hold style pillow case and Sliding with Style has a safety factor (security number) more than 1.5. So the sliding wall movement improvements do not happen again.

REFERENCES

- [1] Bowles, J.E.,(1977), *Foundation Analysis and Design*, McGraw – Hill kogakusha, Ltd., Tokyo, Japan.
- [2] Bowles, J.E.,(1984), *Physical and Geotechnical Properties of Soil*, McGraw – Hill Book Company, USA.
- [3] Das, B.M.,(1983), *Advanced Soil Mechanics*, McGraw – Hill, New York,
- [4] R.B.J Brinkgreve, (2007), *Plaxis b.v.*, Delft University Of Technology, Belanda.
- [5] Terzaghi K, Peck R.B (1967), *Soil Mechanics in Engineering Practice*. John Wiley & Sons, 1967.